



Electric mover Robik Q30



Patented pending

SATES
Electric Handling

Data Sheet

General Features

Model Name	Robik Q30
Manufacturer	SATES di Salvò Luca - SATES Electric Handling
Description	Electric mover, tow and pusher
Power supply	Electric 24 V cc
Plant tension	24 V
Nominal power	1 kW
CE certification	✓
CE marking on rear left-hand side	

Frame characteristics

Frame made of	Steel
Frame treatment	Polyester powder coating
Carter	Steel, painted with epoxy powder
Special Treatment	Cataphoresis (on customer demand only)
Special Carter	stainless steel 316 (on customer demand only)
Colour	Anthracite grey and orange

Safety data

Operator is distant from the area affected by operations	Radio control
Light signalling of movement	Flashing light
Disengagement device on machine	Emergency button
Power supply disconnection device/ Emergency stop	Radio control
Acoustinc signaling Cicalino	Beeper
Electro-magnetic safety brake	2 brakes (10N x 2 = 20N braking power)
Drive controls	Maintained action switch
Handarm vibration	Absent
Noise level at operator's ear	dB < 45
Wheel covers (moves foot)	2 (on customer demand only)

Performances

Max. forward speed	3 km/h
Max. backward speed	3 km/h
Vertical lifting on flat ground	+/- 3.000 kg
Lift capacity on flat ground* (with vertical load min 500 kg)	+/- 490 kg 480 (N)
Towing capacity on flat ground ** (with vertical load min 500 kg)	+/- 450 kg 441 (N)
Max. slope with load	12 %
Max. load force at the lifting plate	130 N
Stopping distance in deceleration (without load) with adequate grip	300mm

* Load capacity is subject to kind of slope, kind of floor and operating time

**While the force expressed in N at the lifting plate remains unchanged, the following circumstances may affect the towing capacity expressed in kg: type of ground on which the towing is performed, the use (or not) of ballasts, type of wheels mounted on the vehicle and/or in the trailer, type of trailer and the presence of frictions visible (or not).

Towbar (on customer demand only)	DE 70 (KN 23) Load kg 150Kg (KN 23)
Back ballast (on customer demand only)	Total kit weight 172 Kg (kit= n°9 plate each of 18 kg)

Lifting

Electro-hydraulic pump	1
Voltage	24 Volt CC
Tank capacity	5 L
Type of oil	Shell Telus 46/Mobil/dte25
Operating temperature	-10°/40°C
% umidity	max 80%
Hydraulic cylinder (special custom made)	1

Drive control

Driving type	Radio remote controlled
Forward/Reverse control	Joystick
Speed adjustment	Joystick
Steering	Joystick
Lifting	Joystick
Emergency stop	On console
Start	Connection to the unit

Battery specifications

Batteries	2
Battery Type	Abt Power Cycle Free Maintenance Traction – Dry Deep Cycle GEL
Battery voltage	12 V
Nominal capacity 5/h	120 Ah
Nominal capacity 20/h	150 Ah
Weight of each battery	38 Kg

Technical data charger High Efficiency Low consumption

Battery charger	External – high frequency
Input voltage	230 V
Input frequency	50-60 Hz
Charger time	+/- 8 h
Battery charger capacity	+/- 25 Ah
Power consumption during complete charge cycle	Max 5 kWh
Operating temperature	-20°
Operation display	Led
Input fuse	16 A
Cooling system	Ventilation cooling
IP degrees of protection	IP20
Width	180 mm
Length	290 mm
Height	85 mm

Technical data motor

Motor	2 electric motors
Electricity	DC
Engine Voltage	24 V
Rating (S2 - 5')	500 W
Maximum peak power	500W x 2=1kW
Service electro magnetic brake	n°2 (10 N x 2= 20 N total brake power)
IP degrees of protection	IP 65
Transmission system	Mechanical
Transmission lubrication	In oil bath
Gear reduction	1:20

Dimensions (see technical drawing)



Length	1540mm
Width	710 mm
MIN Height Loading Platform	226 mm
MAX Height Loading Platform	522 mm
Wheelbase	576 mm
Turning circle	360°
Weight	350 kg

Standard wheels

Hub + sprocket	n°2 steel c45
Drive wheels Cuscion Technic Material Shore A 95 High Flow	1 twin wheels 2000 kg
Pivoting wheels Technic Material Shore A 92 High Flow	1 twin wheels 2800 kg
Dimensions drive wheels	200/50 x 2
Dimension steering wheel	150/80 x 2


Optional wheels

Drive wheels super elastic	On customer demand only
Pivoting wheels super elastic	On customer demand only

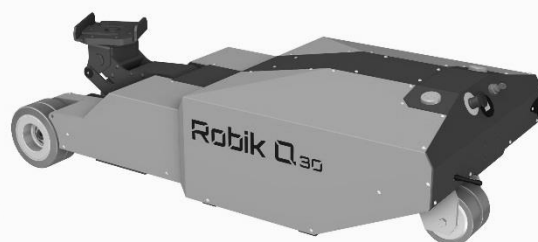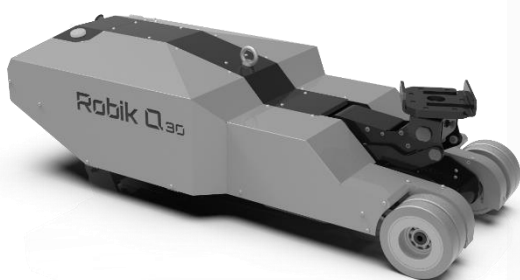

PLEASE NOTE the reported data may change over time

Technical drawing

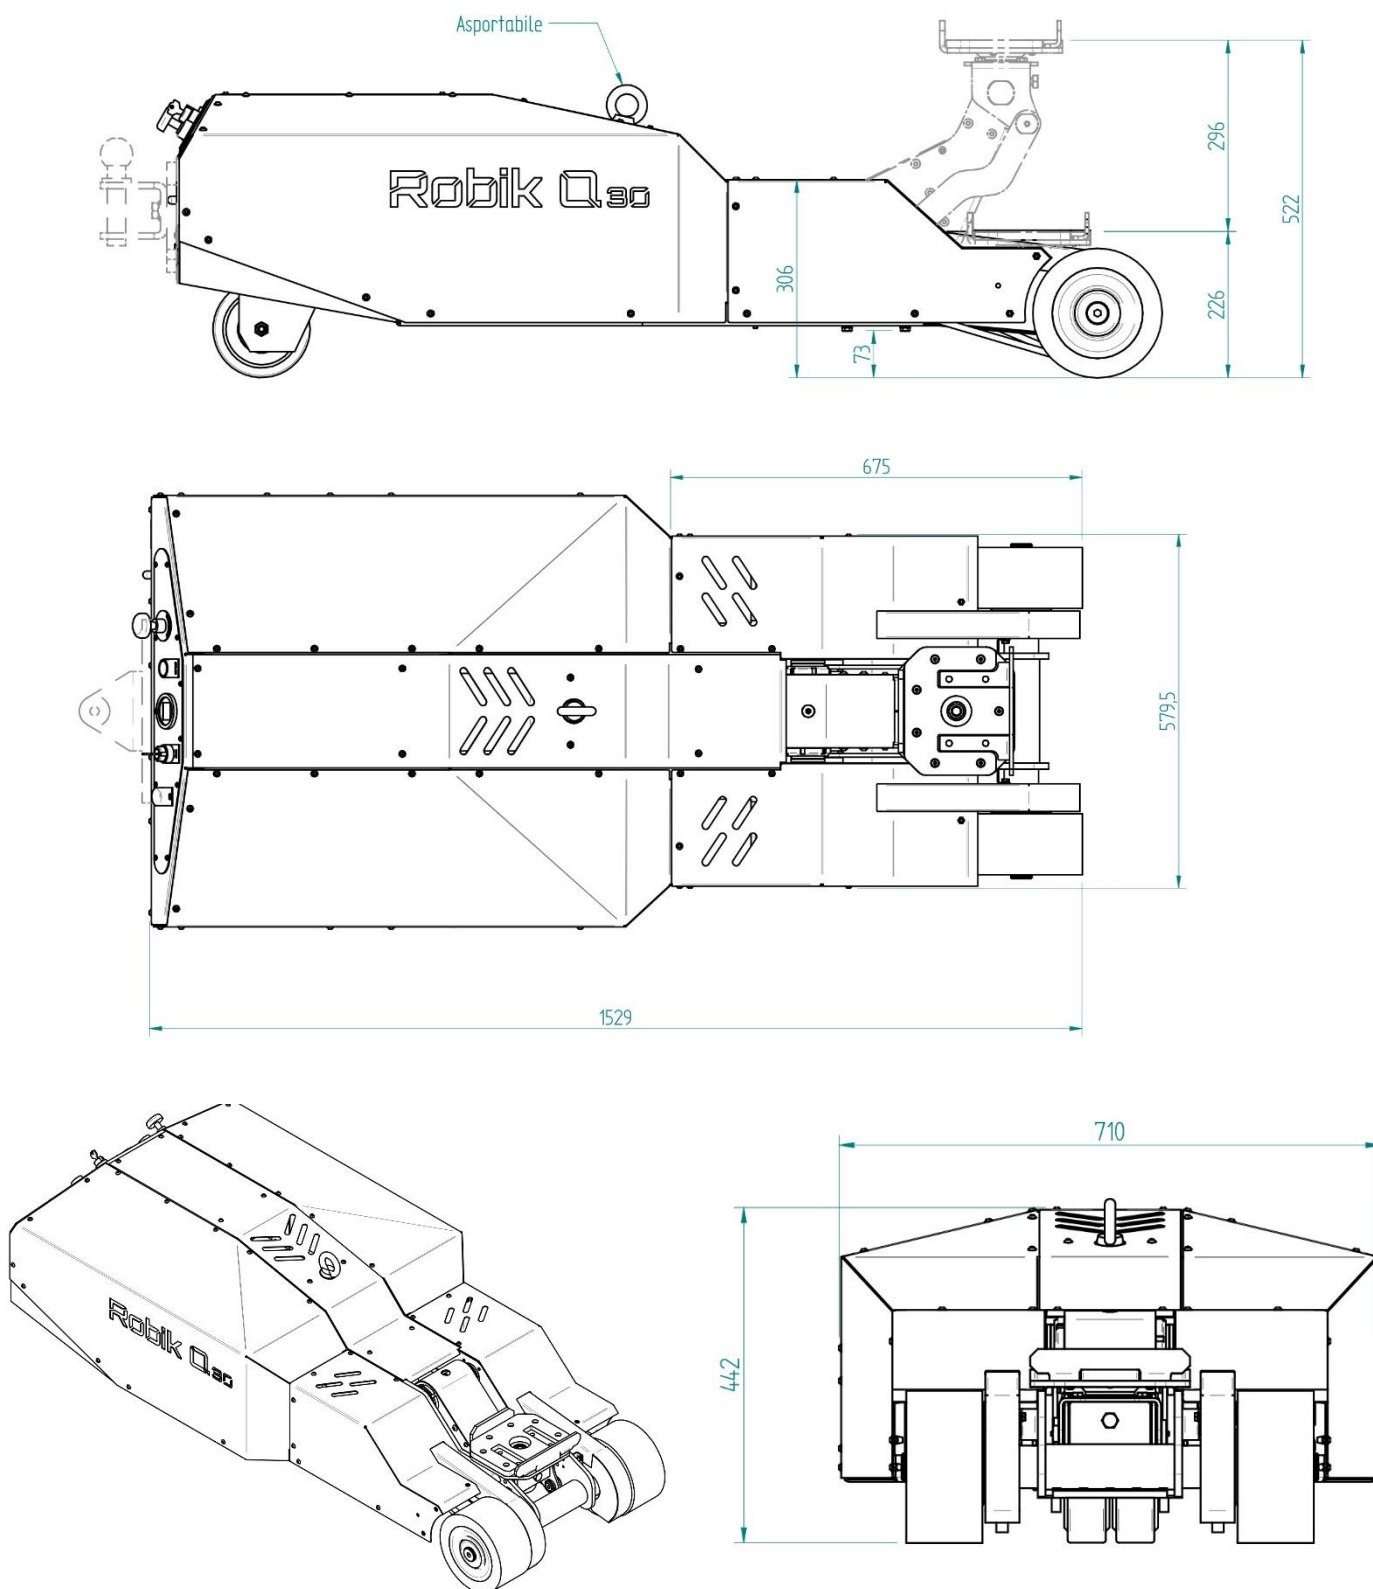

PLEASE NOTE the reported data may change over time

SATES Electric Handling

Via dell'Artigianato, 36 - 35020 Casalserugo (PD)
TEL. 049 643487 - FAX 049 8749686 - SDI M5UXCR1
www.robik.it - supporto@robik.it

